

jc713 U.S. PTO

Please type a plus sign (+) inside this box → ☐

PTO/SB/05 (4/98)  
Approved for use through 09/30/2000. OMB 0651-0032  
Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE  
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

# UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 C.F.R. § 1.53(b))

Attorney Docket No. LSI-4  
First Inventor or Application Identifier LSI-4  
Title Pocket Lighter  
Express Mail Label No. EL273440220US

## APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

ADDRESS TO: Assistant Commissioner for Patents  
Box Patent Application  
Washington, DC 20231

1. ☐ \* Fee Transmittal Form (e.g., PTO/SB/17)  
(Submit an original and a duplicate for fee processing)
2. ☒ Specification [Total Pages 18]  
(preferred arrangement set forth below)
  - Descriptive title of the Invention
  - Cross References to Related Applications
  - Statement Regarding Fed sponsored R & D
  - Reference to Microfiche Appendix
  - Background of the Invention
  - Brief Summary of the Invention
  - Brief Description of the Drawings (if filed)
  - Detailed Description
  - Claim(s)
  - Abstract of the Disclosure
3. ☒ Drawing(s) (35 U.S.C. 113) [Total Sheets 8]
4. Oath or Declaration [Total Pages ]
  - a. ☐ Newly executed (original or copy)
  - b. ☐ Copy from a prior application (37 C.F.R. § 1.63(d))  
(for continuation/divisional with Box 16 completed)
    - i. ☐ DELETION OF INVENTOR(S)  
Signed statement attached deleting inventor(s) named in the prior application, see 37 C.F.R. §§ 1.63(d)(2) and 1.33(b).

5. ☐ Microfiche Computer Program (Appendix)
6. Nucleotide and/or Amino Acid Sequence Submission  
(if applicable, all necessary)
  - a. ☐ Computer Readable Copy
  - b. ☐ Paper Copy (identical to computer copy)
  - c. ☐ Statement verifying identity of above copies

## ACCOMPANYING APPLICATION PARTS

7. ☐ Assignment Papers (cover sheet & document(s))
8. ☐ 37 C.F.R. § 3.73(b) Statement ☐ Power of Attorney  
(when there is an assignee)
9. ☐ English Translation Document (if applicable)
10. ☐ Information Disclosure Statement (IDS)/PTO-1449 ☐ Copies of IDS Citations
11. ☐ Preliminary Amendment
12. ☒ Return Receipt Postcard (MPEP 503)  
(Should be specifically itemized)
13. ☐ \* Small Entity Statement(s) ☐ Statement filed in prior application, Status still proper and desired (PTO/SB/09-12)
14. ☐ Certified Copy of Priority Document(s)  
(if foreign priority is claimed)
15. ☒ Other: Express mail certificate

**NOTE FOR ITEMS 1 & 13: IN ORDER TO BE ENTITLED TO PAY SMALL ENTITY FEES, A SMALL ENTITY STATEMENT IS REQUIRED (37 C.F.R. § 1.27), EXCEPT IF ONE FILED IN A PRIOR APPLICATION IS RELIED UPON (37 C.F.R. § 1.28).**

16. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below and in a preliminary amendment:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No: \_\_\_\_\_

Prior application information: Examiner \_\_\_\_\_ Group / Art Unit: \_\_\_\_\_

For CONTINUATION or DIVISIONAL APPS only: The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 4b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.

## 17. CORRESPONDENCE ADDRESS

☐ Customer Number or Bar Code Label

(Insert Customer No. or Attach bar code label here)

or ☒ Correspondence address below

Name	Craig N. Killen				
	Dority & Manning, P.A.				
Address	P.O. Box 1449				
City	Greenville	State	SC	Zip Code	29602-1449
Country		Telephone	803-256-2005	Fax	803-933-0066

Name (Print/Type)	Craig N. Killen	Registration No. (Attorney/Agent)	35,218
Signature	<i>Craig N. Killen</i>	Date	11-12-99

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231.

ATTORNEY DOCKET NO.: LSI-4

UNITED STATES PATENT APPLICATION

FOR

POCKET LIGHTER

## POCKET LIGHTER

Background of the Invention

5 The present invention relates generally to the art of pocket lighters, often referred to as "cigarette lighters." More particularly, the invention relates to an improved pocket lighter which is adapted to enhance its child resistance characteristics.

10 The domestic standards for child resistance of pocket lighters are set forth at 16 C.F.R., Part 1210. New lighters proposed for sale must be shown to satisfy the child resistance standards before the lighters can be sold in the United States. Manufacturers of pocket lighters have employed  
15 various techniques in an effort to comply with the child resistance standards.

In this regard, some lighters utilize a mechanism preventing the lighter's thumb button from being depressed unless a preliminary step is first  
20 taken. For example, it may be necessary to move a slider mechanism to a predetermined position before the thumb button can be depressed. While such techniques have worked generally well, there is a need in the art for additional novel constructions of  
25 pocket lighters.

Summary of the Invention

A pocket lighter in accordance with one aspect of the present invention comprises a gas container having an outlet valve through which ignitable gas is  
30 released. An igniter device having a reciprocative

**EXPRESS MAIL CERTIFICATE**

"Express Mail" - Mailing Label Number EL273440220US

Date of Deposit November 12, 1999

I hereby certify that this paper and any referenced attachment and/or fee are being deposited with the U.S. Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to Box Patent Application, Assistant Commissioner for Patents, Washington D.C. 20231.

Martha Boynton

(Typed or printed name of person mailing paper or fee)

Martha Boynton

(Signature of person mailing paper or fee)

plunger is also provided. The igniter device is operative to produce a spark when the plunger is axially moved. A thumb actuator is operative to cause opening of the outlet valve and axial movement of the reciprocative plunger, thereby producing a controlled flame. The pocket lighter is constructed and arranged such that at least ten pounds of force is required to operate the thumb actuator.

In some exemplary embodiments, a valve spring is situated so as to operate against opening of the outlet valve. The valve spring thus contributes to the force required to operate the thumb actuator. Often, the pocket lighter will comprise an outlet tube in fluid communication with the outlet valve. In such cases, the valve spring may comprise a helical spring located about the outlet tube.

The pocket lighter may be constructed so that the outlet valve is opened via a pivotal lever engaged by the actuator button. In some exemplary embodiments, a fulcrum location of the pivotal lever will be located approximately 2.0 millimeters from an axis of the outlet valve. Preferably, the lever and outlet valve will contribute at least about two pounds of force to the force required to operate the thumb actuator.

In some exemplary embodiments, at least one actuator spring contributes to the force required to operate the thumb actuator. Preferably, the actuator spring will be operative to contribute at least about five pounds of force to the force required to operate the thumb actuator. Depending on the exigencies of a particular application, the actuator spring may take on a variety of different configurations. For

example, a pair of coaxial helical springs may be used for this purpose. In some cases, the actuator spring may be located beside the igniter device. Alternatively, the actuator spring may be located  
5 beneath a bottom surface of the igniter device.

The pocket lighter may comprise an outer housing having a housing end cap configured to be fit therein. In some such embodiments, an actuator spring located between the housing end cap and the  
10 thumb actuator may provide a predetermined force for operation of the thumb actuator.

In another aspect, the pocket lighter comprises an outer housing having an open end. A housing end cap is configured to be fit into the open end of the  
15 outer housing. A gas container, having an outlet valve through which ignitable gas is released, is located in the housing. An igniter device is also located in the housing, having a reciprocative plunger operative to produce a spark when axially  
20 moved. A thumb actuator is located at the housing end cap and moveable with respect thereto. The thumb actuator is operative to cause opening of the outlet valve and axial movement of the reciprocative plunger to thereby produce a controlled flame. An actuator  
25 spring is located between the housing end cap and the thumb actuator to provide a predetermined force for operation of the thumb actuator.

In some exemplary embodiments, the actuator spring is a helical spring. For example, a helical  
30 spring may be located about a shaft of the thumb actuator. In this regard, the thumb actuator may be configured having a button portion located at one end of the shaft. The helical spring in such embodiments

will typically engage a bottom surface of the button portion.

5 A still further aspect of the present invention is achieved by a pocket lighter comprising an outer housing having an open end. A housing end cap is configured to be fit into the open end of the outer housing. A gas container located in the housing has an outlet valve through which ignitable gas is released. An igniter device, also located in the  
10 housing, has a reciprocative plunger operative to produce a spark when axially moved. A thumb actuator is located at the housing end cap and moveable with respect thereto. The thumb actuator is operative to cause opening of the outlet valve and axial movement  
15 of the reciprocative plunger to thereby produce a controlled flame. The pocket lighter further comprises a pivotal lever extending between the outlet valve and the thumb actuator. The pocket lighter is constructed and arranged such that at  
20 least ten pounds of force are required to operate the thumb actuator.

Other objects, features and aspects of the present invention are achieved by various combinations and subcombinations of the disclosed  
25 elements, which are discussed in greater detail below.

#### **Brief Description of the Drawings**

30 A full and enabling disclosure of the present invention, including the best mode thereof, to one of ordinary skill in the art, is set forth more particularly in the remainder of the specification, including reference to the accompanying drawings, in which:

Figure 1 is a perspective view showing the external appearance of a pocket lighter that may be improved according to the present invention;

5 Figure 2 is a cutaway view showing internal components of a pocket lighter in accordance with the prior art;

Figure 3 is a cutaway view showing internal components of a pocket lighter in accordance with one aspect of the present invention;

10 Figure 4 is a cutaway view showing internal components of a pocket lighter in accordance with another aspect of the present invention;

15 Figure 5 is a cutaway view showing internal components of a pocket lighter in accordance with the prior art;

Figure 6 is a view similar to Figure 5 showing one manner in which the pocket lighter thereof may be improved according with the present invention;

20 Figure 7 is a cutaway view showing internal components of a pocket lighter in accordance with a still further aspect of the present invention;

Figure 8 is a cutaway view showing internal components of a pocket lighter in accordance with an additional aspect of the present invention;

25 Figure 9 is a cutaway view showing internal components of a pocket lighter in accordance with another aspect of the present invention;

30 Figure 10 is a cutaway view showing internal components of a pocket lighter in accordance with a still further aspect of the present invention; and

Figure 11 is a view of the pocket lighter of Figure 10 with certain parts separated for purposes of explanation.



Repeat use of reference characters in the present specification and drawings is intended to represent same or analogous features or elements of the invention.

5

#### Detailed Description of Preferred Embodiments

It is to be understood by one of ordinary skill in the art that the present discussion is a description of exemplary embodiments only, and is not intended as limiting the broader aspects of the present invention, which broader aspects are embodied in the exemplary constructions.

10

15

Figure 1 illustrates a typical pocket lighter 10 that may be improved according to the present invention. The exterior of pocket lighter 10 is formed by an outer housing 12 having an open end into which an end cap 14 is fit. A head cover 16 is pivotally attached to end cap 14, as shown.

20

As can be seen, lighter 10 includes a flame port 18. A thumb actuator, here in the form of thumb button 20, is carried by the housing end cap. Depression of thumb button 20 will cause a controlled flame to be produced at flame port 18. Preferably, the flame will cease when the user releases thumb button 20.

25

30

The internal construction of lighter 10 may be most easily explained with reference to Figure 2. As shown, a gas container 22 is located in the bottom portion of outer housing 12. Gas container 22 is adapted to contain a predetermined quantity of a suitable ignitable gas, such as butane. Gas container 22 may be refilled by butane received through an orifice (not shown) defined in the bottom of outer housing 12.

Preferably, gas container 22 is made of a rigid plastic material which is configured having various features in addition to the gas reservoir. For example, gas container 22 preferably includes upstanding posts, such as post 24, for connection to depending posts 26 and 28 of end cap 14. Through-pins 30 and 32 are provided to innerconnect the upstanding posts of gas container 22 with the depending posts of end cap 14.

Gas container 22 includes an outlet valve 34 through which ignitable gas is selectively released. An outlet tube provides fluid communication between valve 34 and flame port 18. As shown, the outlet tube has a flexible tube portion 36 and a rigid tube portion 38.

Lighter 10 further includes an igniter device 40 seated into a configured receptacle defined in the top surface of gas container 22. Igniter device 40 does not include a sparking flint wheel, but operates to create a spark via an electronic catalyst that is activated by the depression of a reciprocative plunger 42. Igniter device 40 includes an electrode 44 in close proximity to tube portion 38. Thus, movement of plunger 42 in the downward direction (as indicated by the arrow) causes a spark to be produced at electrode 44.

Plunger 42 is moved in the downward axial direction when a user depresses thumb button 20. As can be seen, igniter device 40 has an internal spring 46 which urges plunger 42 into a normally upward position.

As shown, thumb button 20 includes an extension 48 engaging one end of a lever 50. Lever 50 pivots

on a fulcrum 52 (formed integrally with gas container 22) to move valve 34 in an upward axial direction. When valve 34 is moved in this manner, it is opened so that gas will be released from container 22.

5 Flexible tube portion 36 allows the outer tube to deform slightly to accommodate the axial movement of valve 34.

It can be seen that depression of thumb button 20 will cause two events to take place. One, valve 10 34 will be opened, thus releasing ignitable gas from container 22. Two, a spark will be generated at electrode 44 of igniter device 40. As a result, a controlled flame will be produced at flame port 18, as desired. The flame will cease when thumb button 15 20 is released.

It will be appreciated that the majority of the force required to depress thumb button 20 is contributed by the spring constant of spring 46. In other words, most of the force necessary to depress 20 thumb button 20 is force required to overcome spring 46. Generally, lighters of this type have been constructed so that about 4-5 pounds of force will be necessary to produce a flame.

In accordance with the present invention, it has 25 been found that the child resistance characteristics of a pocket lighter can be enhanced if at least ten pounds of force are required to depress the thumb button. This greater force may be achieved by substituting a larger spring for spring 46. It is 30 often undesirable, however, to utilize a larger spring in this location, since it may have a tendency to shorten the operational life of the igniter.

Thus, Figures 3-4 and 6-9 illustrate various techniques which may be utilized to augment the force provided by the spring located within the igniter device. These techniques may be utilized singly or in combination until a desired force level is achieved. Within each embodiment, conventional elements which are also present in pocket lighter 10 will be indicated by the same reference number. However, the overall embodiment and unique aspects of each embodiment will be indicated by a reference number augmented by 100 in relation to a previous embodiment.

Thus, Figure 3 illustrates a pocket lighter 110 made in accordance with one aspect of the present invention. In this embodiment, a valve spring 154 is situated to operate against opening of outlet valve 34. Valve spring 154 is constructed as a helical spring in this case, situated about flexible tube portion 36. When valve 34 is opened, spring 154 compresses between the upper surface of lever 50 and a retaining flange 56 fixed to rigid tube portion 38. Spring 154 is sized to achieve the desired level of overall force necessary to depress thumb button 20.

Another technique that may be utilized to increase the depression force at thumb button 20 is illustrated in Figure 4. Specifically, Figure 4 shows a pocket lighter 210 in which the moment of lever 50 has been altered to achieve a greater depression force. As shown in lighter 10 of the prior art, fulcrum 52 is normally placed just under the outlet tube. In this case, however, fulcrum 252 is moved away from the center axis of outlet valve 34 by a distance X. Preferably, the distance X will be

at least approximately 2 mm. When fulcrum 252 is placed in this location, lever 50 and outlet valve 34 will contribute at least about two pounds to the overall depression force.

5        Before proceeding to discuss additional embodiments of the present invention, it is helpful to explain one further aspect of the prior art. In this regard, Figure 5 illustrates a pocket lighter 310 of the prior art having a relatively small  
10        actuator spring 356. As shown, spring 356 extends between a recess defined in the bottom of thumb button 20 and the top surface of plunger 342. This figure also illustrates one manner in which thumb button 20 may be constructed. Specifically, thumb  
15        button 20 includes a metal outer portion 58 having a plastic insert 60 situated therein.

      Figure 6 illustrates an improved pocket lighter 310' constructed in accordance with the invention. In this case, the relatively small spring 356 of  
20        lighter 310 has been replaced by a "bigger" spring 356'. The spring constant of spring 356' is chosen to produce the desired level of actuation force for thumb button 20. For example, spring 356' may  
25        contribute at least five pounds to the overall depression force in many exemplary embodiments.

      Figure 7 illustrates an alternative technique for providing a higher level of spring force for actuation of thumb button 20. In this case, a pocket  
30        lighter 310" is provided having a pair of coaxial helical springs which must be overcome when thumb button 20 is depressed. Spring 356 may be the same as in the prior art of Figure 5. An outer spring 362 provides the additional spring force desired to

enhance the child-resistance characteristics of the lighter.

5 A still further alternative technique by which the actuation force of the lighter may be increased is shown in Figure 8. Specifically, Figure 8 illustrates a pocket lighter 410 having an actuator spring 464 located beside igniter device 40. In this embodiment, gas container 422 is configured to provide an integral seat 466 against which one end of  
10 spring 464 will rest. The opposite end of spring 464 is engaged by an extension portion 468 formed integral with thumb button 420.

Figure 9 illustrates a pocket lighter 510 constructed in accordance with an additional aspect  
15 of the invention. In this case, gas container 522 is configured to define a deepened receptacle 570 in which igniter device 40 is seated. The depth of receptacle 570 permits an actuator spring 572 to be situated beneath igniter device 40. Spring 572 thus  
20 contributes to the overall force required to depress the thumb button.

Figures 10 and 11 illustrate a pocket lighter 610 constructed in accordance with a further aspect of the present invention. As shown, lighter 610  
25 includes an outer housing 612 having an end cap 614 fitted into one end thereof. A gas container 622 is located inside of housing 612, as shown. Gas container 622 defines a receptacle in which an igniter device 640 is seated. Igniter device 640  
30 includes a reciprocative plunger 642 which is moved axially when thumb button 620 is depressed.

An upstanding post 624 extends upwardly from the main portion of gas container 622, as shown. A

fulcrum 652 is located adjacent to post 624 to provide a surface about which lever 650 can pivot. Lever 650 functions to open outer valve 634 in a manner similar to that described above.

5        In this case, thumb button 620 is configured having a button portion 674 located at one end of a movable shaft 676. An extension 648 integrally depends from thumb portion 674 to engage one end of lever 650.

10        An actuator spring 678 is located about shaft 676, as shown. One end of actuator spring 678 engages the bottom surface of button portion 674. The other end of actuator spring 678 engages a surface fixed with respect to end cap 614. Thus,  
15        spring 678 contributes to the force that must be overcome in order to ignite the gas released from container 622.

20        It can be seen that the present invention provides various novel constructions for a pocket lighter in accordance with the objects set forth above. While preferred embodiments of the invention have been shown and described, modifications and variations may be made thereto by those of ordinary skill in the art without departing from the spirit  
25        and scope of the present invention, which is more particularly set forth in the appended claims. In addition, it should be understood that aspects of the various embodiments may be interchanged both in whole or in part. Furthermore, those of ordinary skill in  
30        the art will appreciate that the foregoing description is by way of example only, and is not intended to be limitative of the invention so further described in such appended claims.

WHAT IS CLAIMED IS:

1. A pocket lighter comprising:  
a gas container having an outlet valve through  
which ignitable gas is released;  
an igniter device having a reciprocative  
5 plunger, said igniter device being operative to  
produce a spark when said plunger is axially moved;  
a thumb actuator operative to cause opening of  
said outlet valve and axial movement of said  
reciprocative plunger to thereby produce a controlled  
10 flame; and  
said pocket lighter being constructed and  
arranged such that at least ten pounds of force are  
required to operate said thumb actuator.
2. A pocket lighter as set forth in claim 1,  
wherein a valve spring is situated so as to operate  
against opening of said outlet valve, said valve  
spring contributing to the force required to operate  
5 said thumb actuator.
3. A pocket lighter as set forth in claim 2,  
wherein said pocket lighter comprises an outlet tube  
in fluid communication with said outlet valve and  
said valve spring comprises a helical spring located  
5 about said outlet tube.
4. A pocket lighter as set forth in claim 1,  
wherein said outlet valve is opened via a pivotal  
lever engaged by said thumb actuator.
5. A pocket lighter as set forth in claim 4,  
wherein a fulcrum location of said pivotal lever is  
located approximately 2.0 millimeters from an axis of  
said outlet valve.
6. A pocket lighter as set forth in claim 4,  
wherein said lever and said outlet valve contribute



at least about two pounds of force to the force required to operate said thumb actuator.

7. A pocket lighter as set forth in claim 1, further comprising at least one actuator spring contributing to the force required to operate said thumb actuator.

8. A pocket lighter as set forth in claim 7, wherein said at least one actuator spring is operative to contribute at least about five pounds of force to the force required to operate said thumb actuator.

9. A pocket lighter as set forth in claim 7, wherein said at least one actuator spring comprises a pair of coaxial helical springs.

10. A pocket lighter as set forth in claim 7, wherein said actuator spring is located beside said igniter device.

11. A pocket lighter as set forth in claim 7, wherein said actuator spring is located beneath a bottom surface of said igniter device.

12. A pocket lighter as set forth in claim 1, comprising an outer housing having a housing end cap configured to be fit therein.

13. A pocket lighter as set forth in claim 12, comprising an actuator spring located between said housing end cap and said thumb actuator to provide a predetermined force for operation of said thumb actuator.

14. A pocket lighter comprising:  
an outer housing having an open end;  
a housing end cap configured to be fit into said open end of said outer housing;  
a gas container located in said housing, said

gas container having an outlet valve through which ignitable gas is released;

an igniter device located in said housing, said igniter device having a reciprocative plunger  
10 operative to produce a spark when axially moved;

a thumb actuator located at said housing end cap and moveable with respect thereto, said thumb actuator operative to cause opening of said outlet valve and axial movement of said reciprocative  
15 plunger to thereby produce a controlled flame; and

an actuator spring located between said housing end cap and said thumb actuator to provide a predetermined force for operation of said thumb actuator.

15. A pocket lighter as set forth in claim 14, wherein said actuator spring is a helical spring.

16. A pocket lighter as set forth in claim 15, wherein said helical spring is located about a shaft of said thumb actuator.

17. A pocket lighter as set forth in claim 16, wherein said thumb actuator has a button portion located at one end of said shaft, said helical spring engaging a bottom surface of said helical spring.

18. A pocket lighter as set forth in claim 14, wherein said outlet valve is opened via a pivotal lever engaged by said thumb actuator.

19. A pocket lighter as set forth in claim 18, wherein a fulcrum location of said pivotal lever is located approximately 2.0 millimeters from an axis of said outlet valve.

20. A pocket lighter as set forth in claim 18, wherein said lever and said outlet valve contribute at least about two pounds of force to the force

required to operate said thumb actuator.

21. A pocket lighter comprising:

an outer housing having an open end;

a housing end cap configured to be fit into said open end of said outer housing;

5 a gas container located in said housing, said gas container having an outlet valve through which ignitable gas is released;

an igniter device located in said housing, said igniter device having a reciprocative plunger  
10 operative to produce a spark when axially moved;

a thumb actuator located at said housing end cap and moveable with respect thereto, said thumb actuator operative to cause opening of said outlet valve and axial movement of said reciprocative  
15 plunger to thereby produce a controlled flame;

a pivotal lever extending between said outlet valve and said thumb actuator; and

said pocket lighter being constructed and arranged such that at least ten pounds of force are  
20 required to operate said thumb actuator.


22. A pocket lighter as set forth in claim 21, wherein a fulcrum location of said pivotal lever is located approximately 2.0 millimeters from an axis of said outlet valve.

23. A pocket lighter as set forth in claim 22, wherein said lever and said outlet valve contribute at least about two pounds of force to the force required to operate said thumb actuator.

24. A pocket lighter as set forth in claim 21, further comprising a head cover pivotally connected to said housing end cap.

### ABSTRACT OF THE DISCLOSURE


A pocket lighter of the present invention comprises a gas container having an outlet valve through which ignitable gas is released. An igniter device having a reciprocative plunger is also provided. The igniter device is operative to produce a spark when the plunger is axially moved. A thumb actuator is operative to cause opening of the outlet valve and axial movement of the reciprocative plunger, thereby producing a controlled flame. The pocket lighter is constructed and arranged such that at least ten pounds of force is required to operate the thumb actuator.

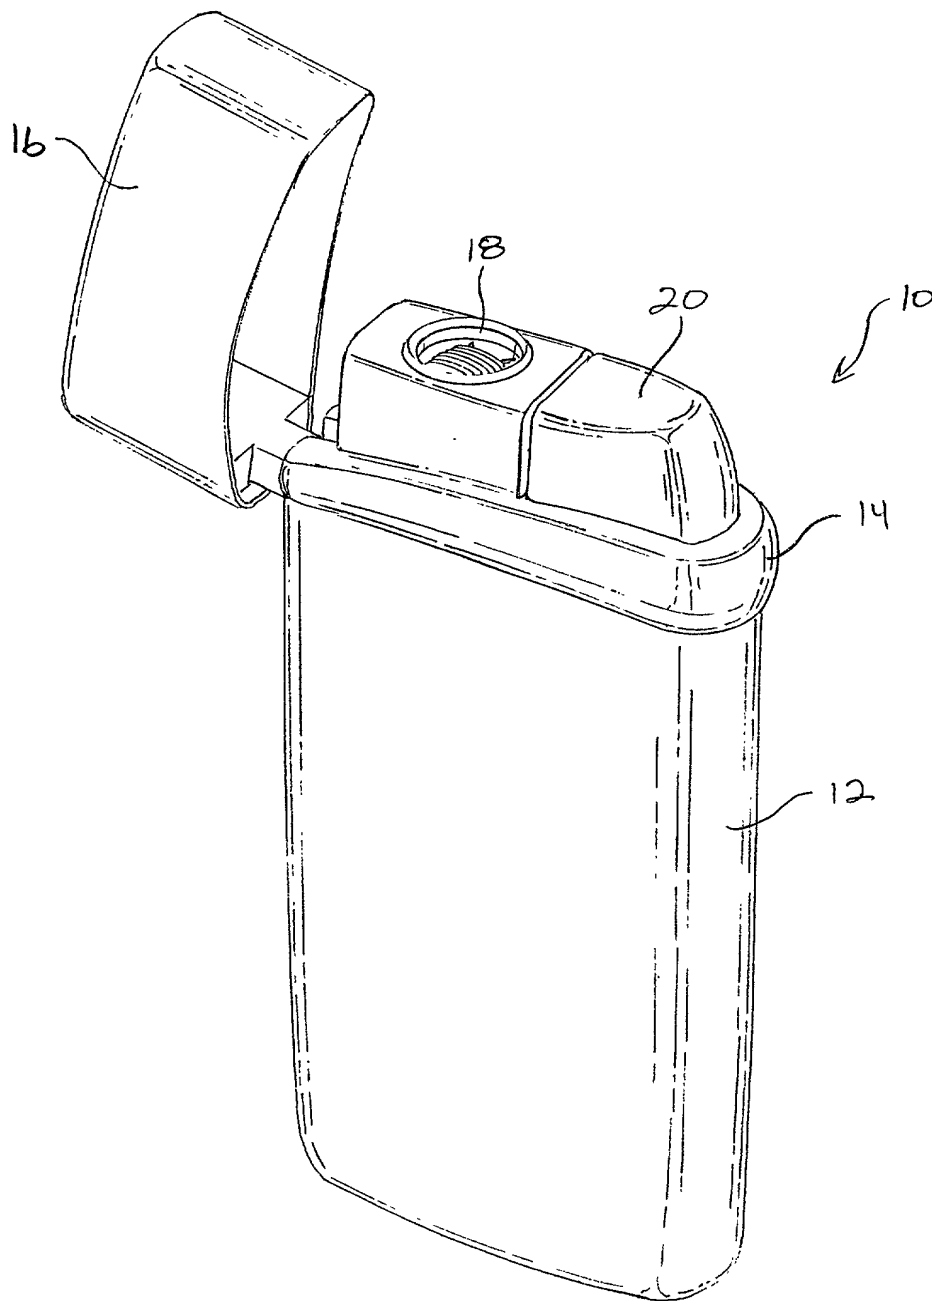

*Fig. 1*

PRIOR ART

PRIOR ART  
Fig. 2

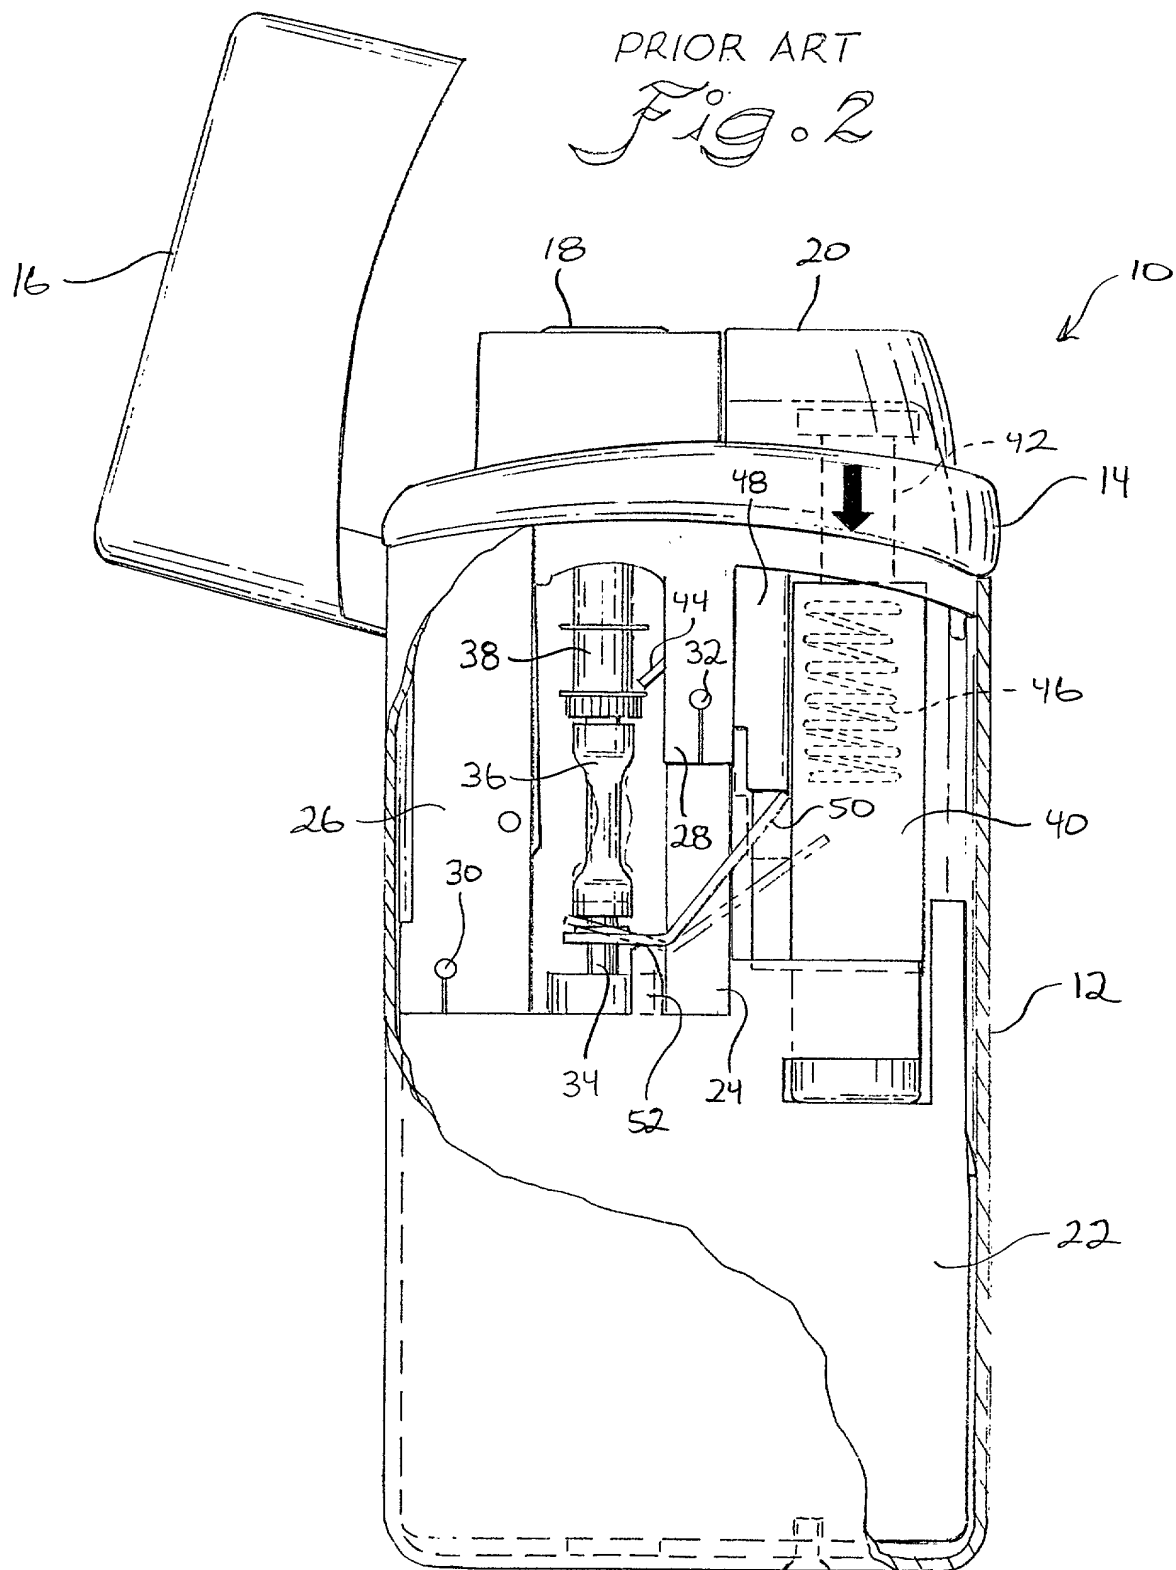

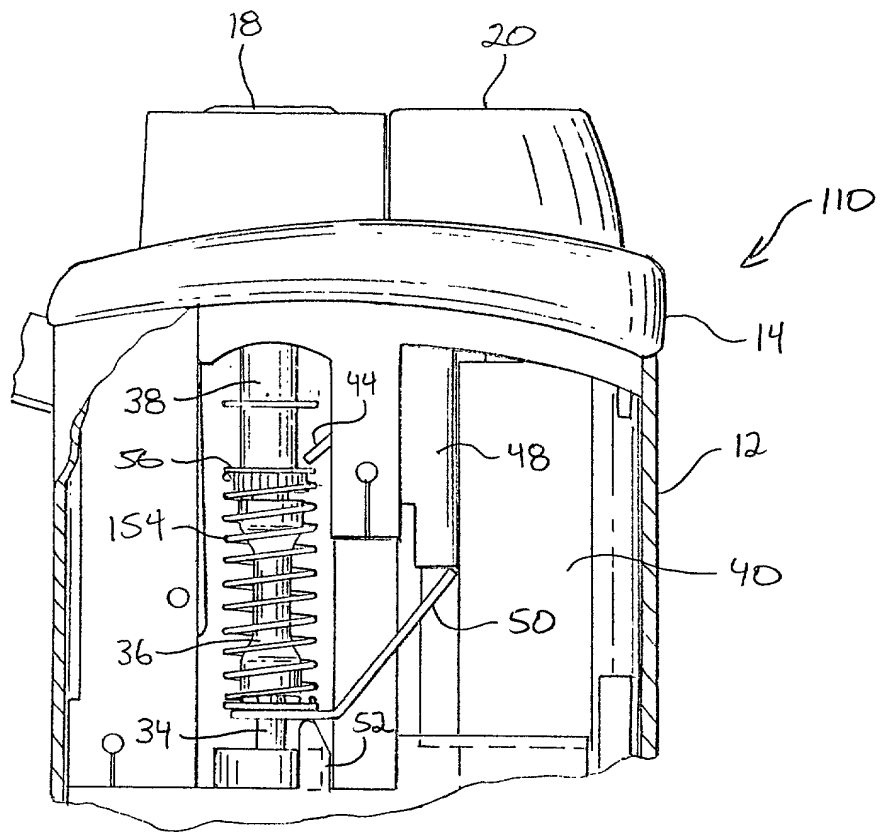


Fig. 3


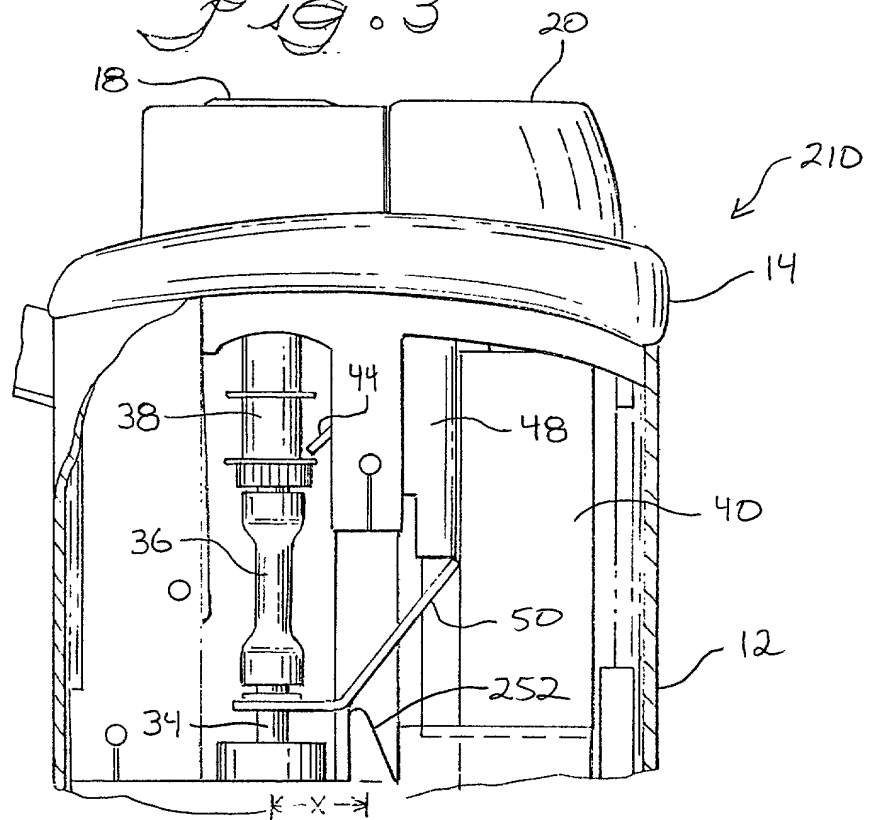


Fig. 4

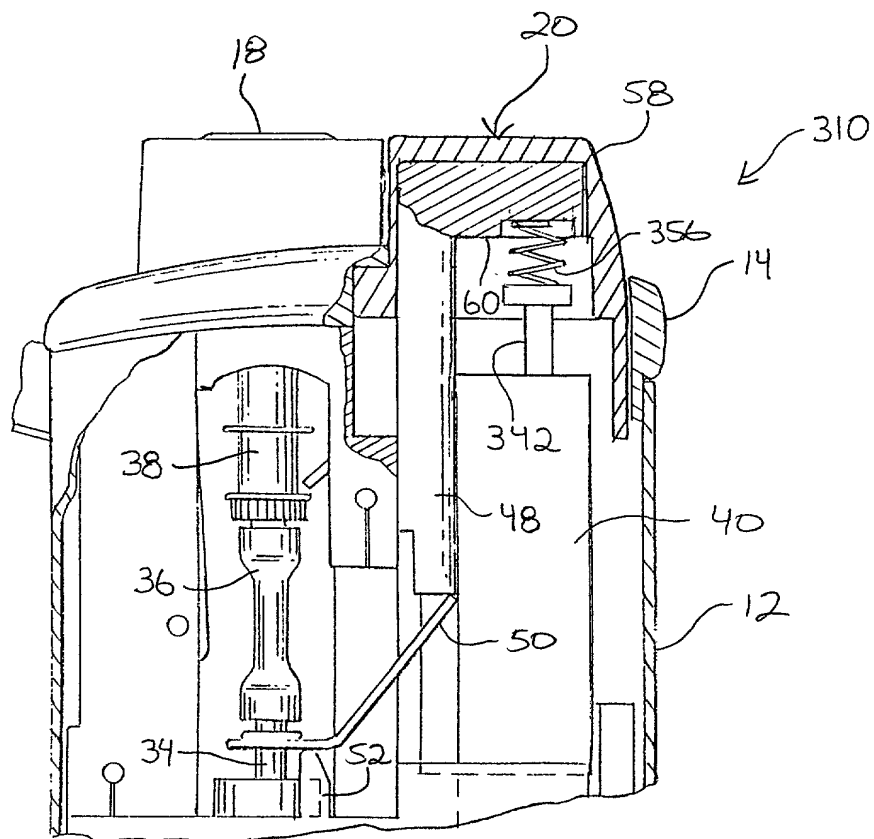

PRIOR ART

Fig. 5

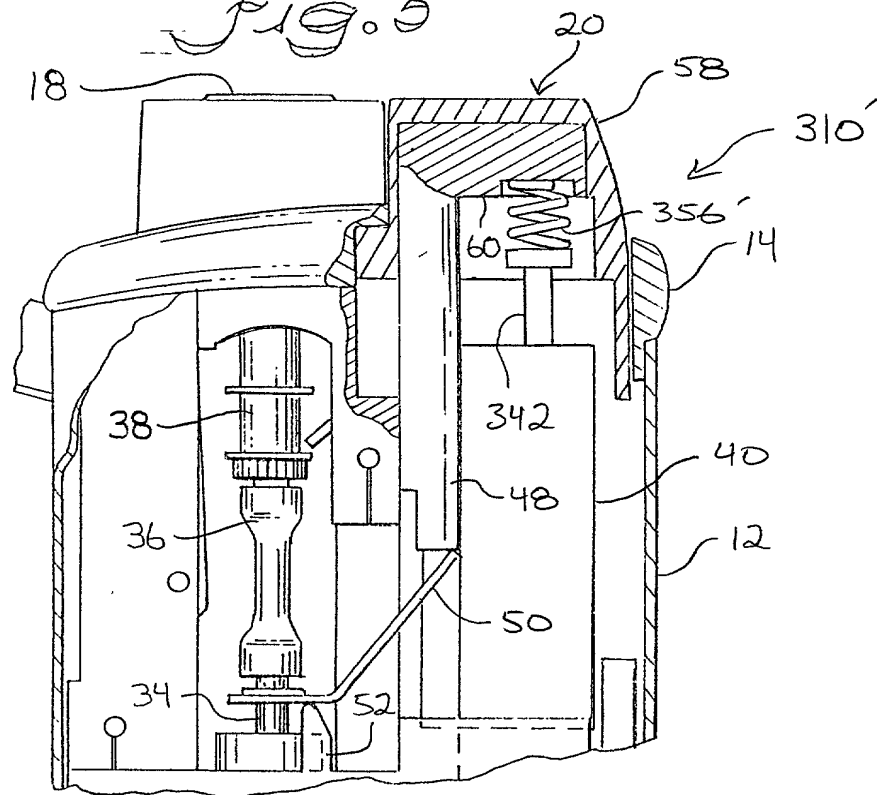
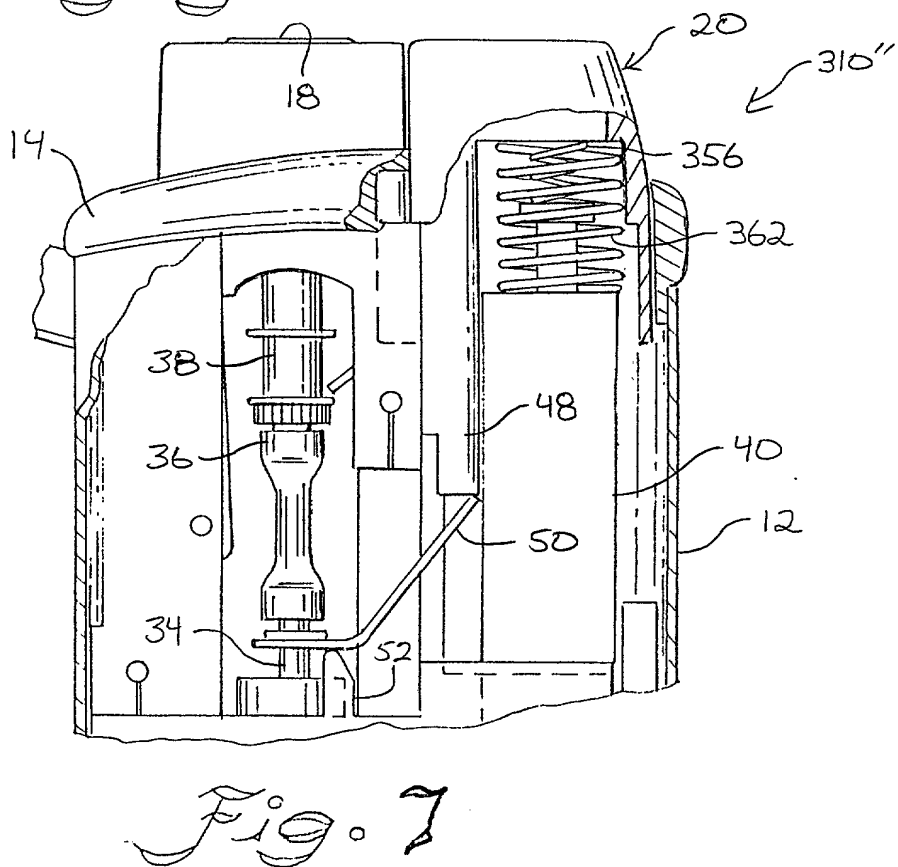
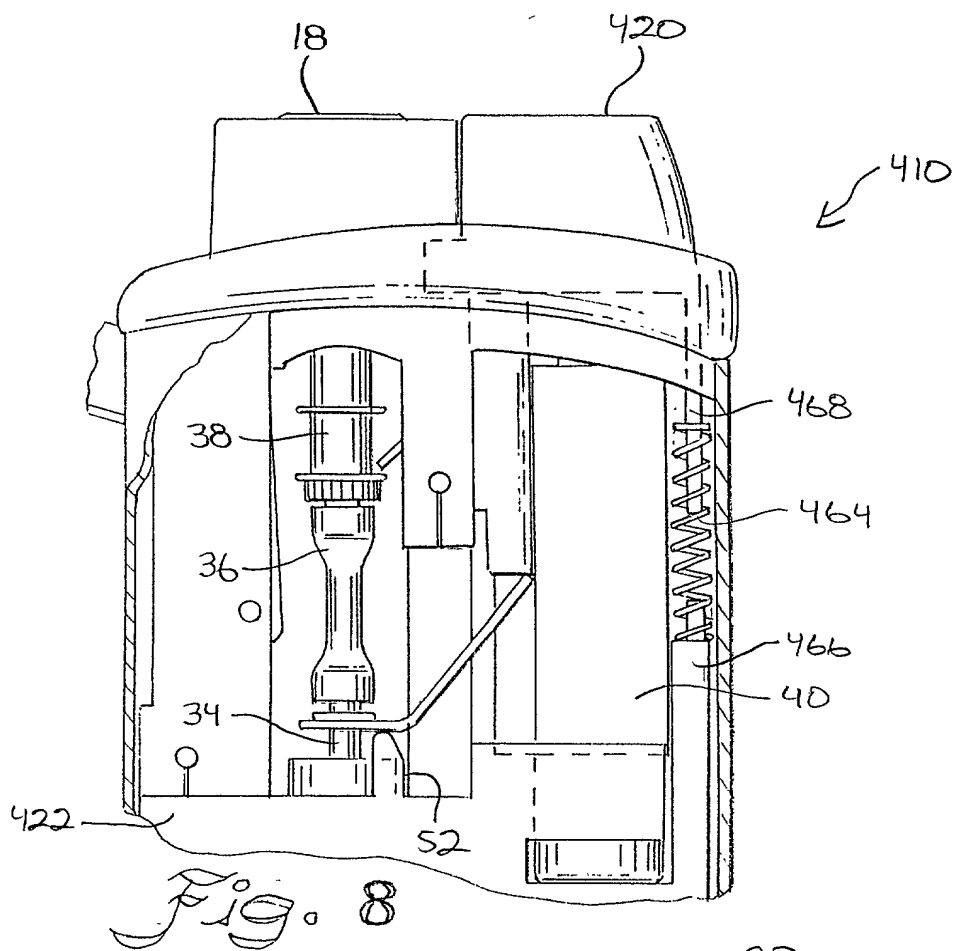


Fig. 6





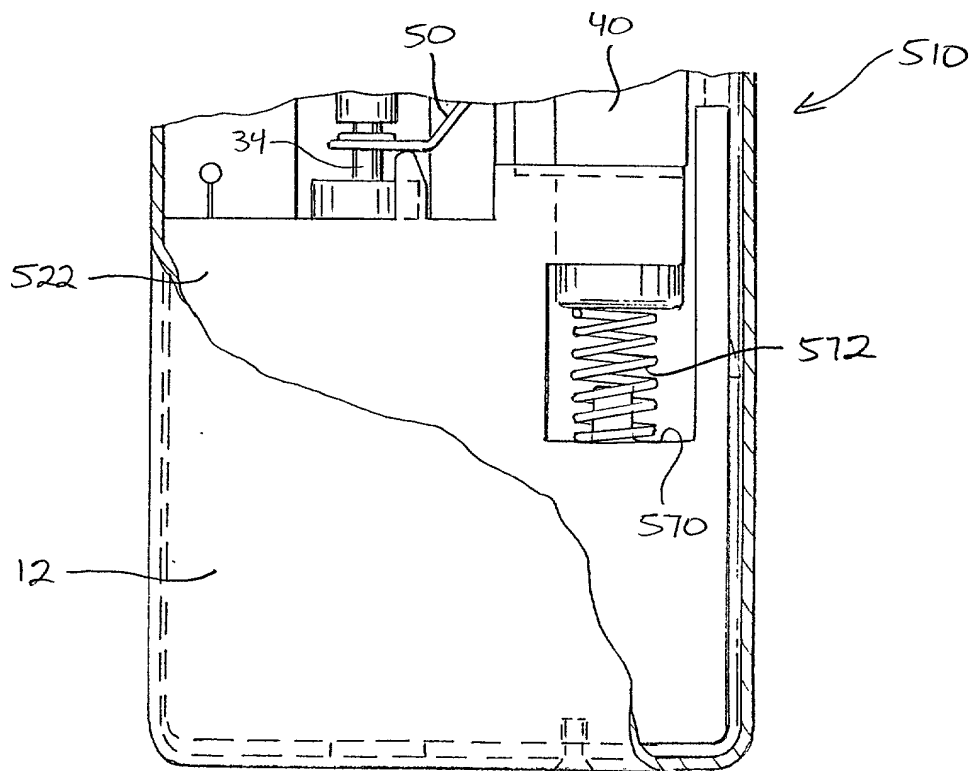


Fig. 9

Year	1972	1973	1974	1975	1976	1977	1978	1979	1980	1981	1982	1983	1984	1985	1986	1987	1988	1989	1990	1991	1992	1993	1994	1995	1996	1997	1998	1999	2000	2001	2002	2003	2004	2005	2006	2007	2008	2009	2010	2011	2012	2013	2014	2015	2016	2017	2018	2019	2020	2021	2022	2023	2024	2025	2026	2027	2028	2029	2030	2031	2032	2033	2034	2035	2036	2037	2038	2039	2040	2041	2042	2043	2044	2045	2046	2047	2048	2049	2050	2051	2052	2053	2054	2055	2056	2057	2058	2059	2060	2061	2062	2063	2064	2065	2066	2067	2068	2069	2070	2071	2072	2073	2074	2075	2076	2077	2078	2079	2080	2081	2082	2083	2084	2085	2086	2087	2088	2089	2090	2091	2092	2093	2094	2095	2096	2097	2098	2099	2100
1972	1973	1974	1975	1976	1977	1978	1979	1980	1981	1982	1983	1984	1985	1986	1987	1988	1989	1990	1991	1992	1993	1994	1995	1996	1997	1998	1999	2000	2001	2002	2003	2004	2005	2006	2007	2008	2009	2010	2011	2012	2013	2014	2015	2016	2017	2018	2019	2020	2021	2022	2023	2024	2025	2026	2027	2028	2029	2030	2031	2032	2033	2034	2035	2036	2037	2038	2039	2040	2041	2042	2043	2044	2045	2046	2047	2048	2049	2050	2051	2052	2053	2054	2055	2056	2057	2058	2059	2060	2061	2062	2063	2064	2065	2066	2067	2068	2069	2070	2071	2072	2073	2074	2075	2076	2077	2078	2079	2080	2081	2082	2083	2084	2085	2086	2087	2088	2089	2090	2091	2092	2093	2094	2095	2096	2097	2098	2099	2100	

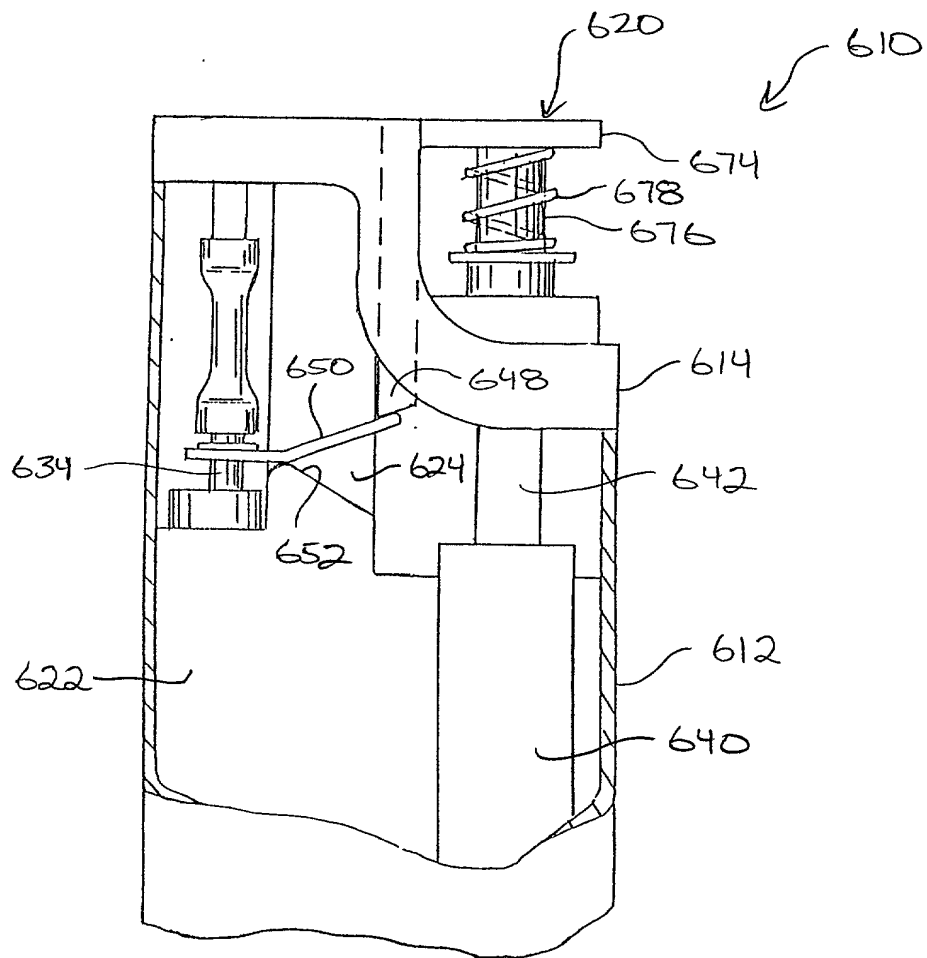


Fig. 11

